

# SP-4 Static Pivot Tensioner

The Static Pivot Tensioner packs up to 10 pounds of force into the smallest area of any York Size 4 tensioner. The tensioner can be used inside or outside the belt and provides up to 44 degrees of motion.

## Operating Characteristics

Range of adjustment - 1.25 inches (31.8mm) over a 44° arc

Maximum force against belt - 10 pounds (4.5 kg) continuous, 15 pounds (6.8 kg) peak


## \* Mounting Data:

- Approximate footprint without pulley of 1.12 inches (28.4mm) wide by 2.25 inches (57.2mm) long
- Minimum clearance from mounting surface to bottom of pulley is .18 inches (4.6mm) except plastic sleeve bearings require .23 inches (5.8 mm) minimum clearance.
- Requires one hole tapped 10-32 or M5 x .8 either through sheetmetal, or blind hole with minimum .38 (9.7mm) bthread depth and one .25 (6.4mm) dia by .25 (6.4mm) min depth clearance hole. See mounting template drawing below.

**If needed, mounting spacers are available from York for higher than standard belt clearances. See [www.york-ind.com/spacers](http://www.york-ind.com/spacers) or contact York for details.**

## \*\* Tensioner Height

- To find your tensioner height, determine Pulley Width + Belt Clearance desired = X
- If X is less than or equal to .600 (15.2mm), tensioner height is 0.925 (23.5mm)
- If X is between .600 (15.2mm) and .875 (22.2mm), tensioner height is 1.200 (30.5mm)
- If X is larger than .875 (22.2mm), consult York Engineering.

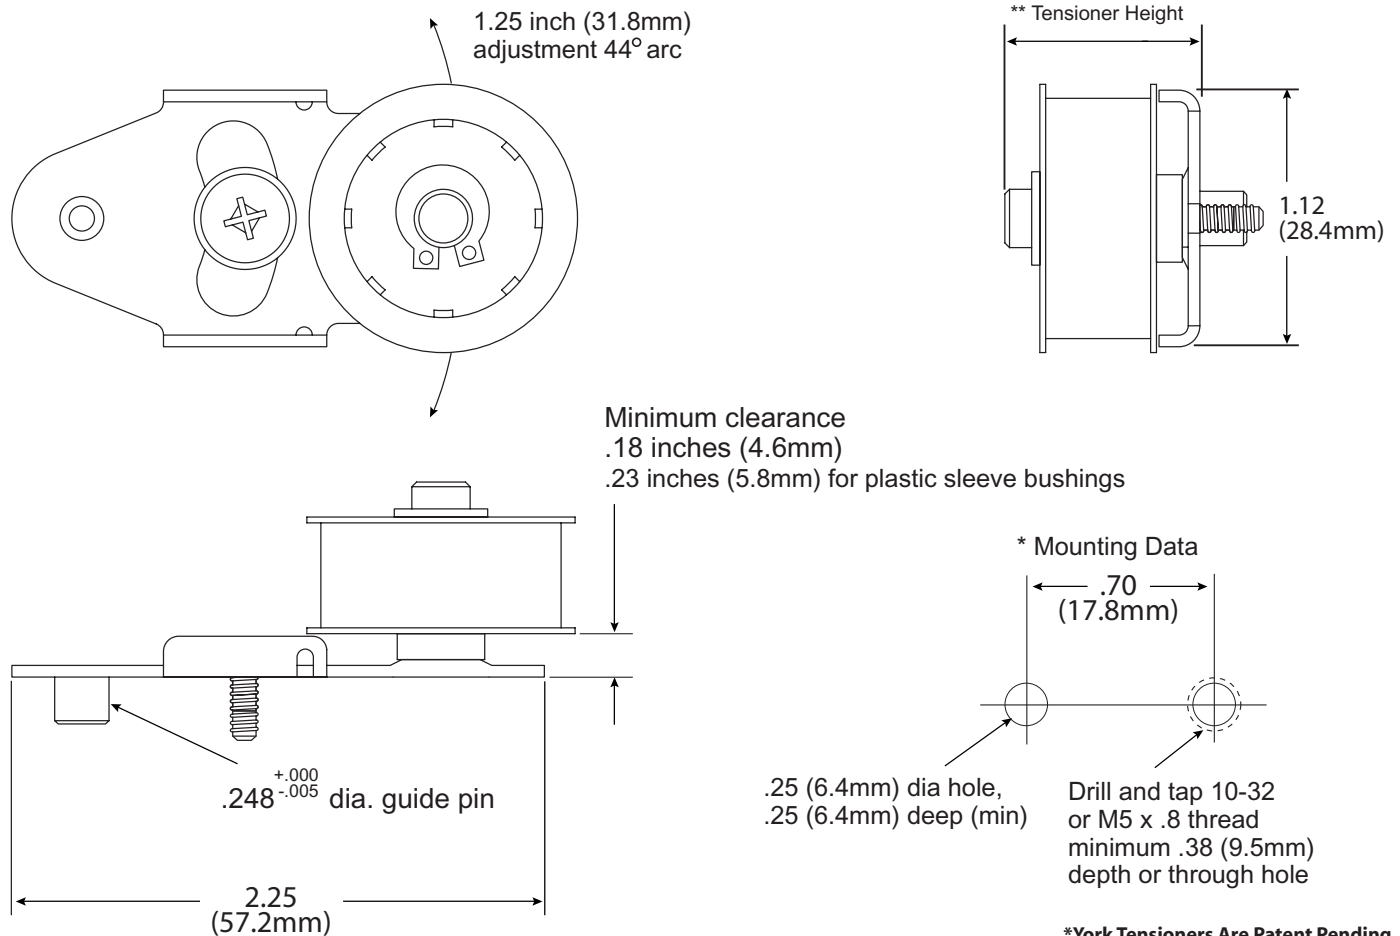

**YORK**  
**INDUSTRIES**  
An ISO 9001-2000 Company

York Industries, Inc.  
303 Nassau Boulevard  
Garden City Park, NY 11040  
Phone: 516-746-3736  
(800) 354-8466  
Fax: 516-746-3741  
[www.york-ind.com](http://www.york-ind.com)

# SP-4 Static Pivot Tensioner (page 2)

## All York Tensioners Include:

301 stainless steel construction for strength and harsh environments	Designs tested to over one million cycles
Operating temperatures possible from -60 F to +185 F (-51 C to 85 C)	Survives salt spray, dust, and condensing high humidity environments with proper bearings
Choice of idler pulley profiles - flat, 2mm GT, 3mm GT MXL, XL, 3mm HTD or 5mm HTD	Idler pulleys available with sealed ball bearings, self lubricating plastic sleeves in aluminum pulleys or self lubricating all plastic pulleys
Ease of assembly with self locking, reusable Phillips hardware in 10-32 or M5 x.8 threads	Idler pulley retaining clip withstands minimum of 15 lbs (6.8 kg) pull force
Downloadable CAD files for tensioners and pulleys	Reference markings to aid in setting belt tensioner during assembly and service
Free access to York's engineering staff for answers to design and application questions	Conductive grease (sealed ball bearings) or static dissipative (plastic) to prevent static electricity build-up on belts
Special mounting bushing to aid in setting belt tension.	Idler shafts are 416 stainless steel hardened to Rockwell C 38-42

## Operating Environments:

Idler Pulley/Bearing Type	Maximum Operating Temperature	Minimum Operating Temperature	High Dust Environments	High Humidity	Relative Cost	Max Speed in RPM
Aluminum/Ball Bearing	185° F (85°C) - may be limited by belt max temp	-60°F (-51°C)	Yes - Sealed ABEC Bearings With Conductive Grease	Yes	More Expensive	Limited by belt, not bearing
Aluminum/Plastic Self Lubricating Sleeve	185° F (85°C) - may be limited by belt max temp	-40°F (-40°C)	OK in most cases	Yes	Moderate - good for small and medium volumes	Up to 4,500 RPM continuous with up to 9,000 RPM peak.
One Piece Self Lubricating Carbon Filled Polycarbonate UL V94-0 Flammability	180°F (82°C)	20°F - consult York for designs down to -40°F (-40°C)	Generally not for extremely high dust areas	Yes - to 95% but must be non condensing	Least Expensive. Need high volumes if custom mold required	Up to 4,500 RPM continuous with up to 7,000 RPM peak



**INDUSTRIES**

An ISO 9001-2000 Company

York Industries, Inc.  
 303 Nassau Boulevard  
 Garden City Park, NY 11040  
 Phone: 516-746-3736  
 (800) 354-8466  
 Fax: 516-746-3741  
 www.york-ind.com